


POWERONE PRESS-FIT

Powerelements

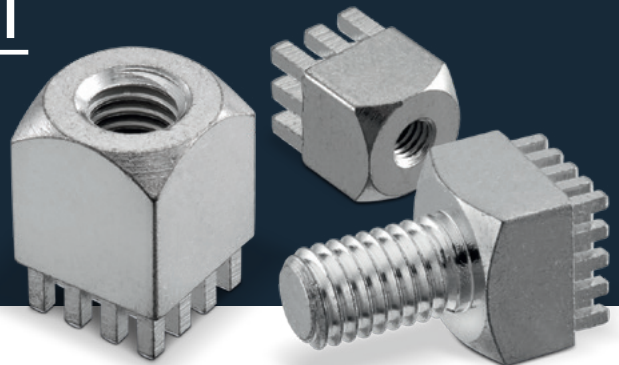

PowerOne Press-fit Powerelements are one-piece high current contacts in solid design which are used for the supply and distribution of high currents to PCBs. They are flexible, configurable, and easily usable in thousands of various designs. Depending on the pin arrangement and the layout, currents of up to 1000 amperes are possible. This makes these power supply terminals ideal for use as connection elements for fuses, for cable connections to the PCB, or as fastening elements.

Applications

- Contacting / mounting of switches, fuses, etc.
- Wire-to-board screw connection of the cable lugs
- Board-to-board
- Electromechanics such as mounting of housings and space

Processing

PowerOne Press-fit Powerelements are pressed into the PCB. Soldering is not required, so there is no temperature stress. The manufacturing step easily fits into the process and is highly cost effective. With the aid of the corresponding tools, several Powerelements can be pressed-in simultaneously.

Processing information

- For assembling prototypes, no special equipment is required for pressing-in, as a simple toggle press is sufficient.
- The PCB must be supported during the press-fit process.
- The press force has to be applied at a 90° angle to the PCB.
- Plated through holes of the PCB must be executed according to the specifications of Wurth Elektronik ICS.
- The PowerOne Press-fit high current contacts are designed for pressing-in, and a soldering process is not intended.
- Use only with suitable press-fit tool and fixing materials (see processing instructions).

| Technical data | |
|---------------------------|---------------------------------------------------------------------------|
| Current carrying capacity | see table on the back |
| Material | CuZn39Pb3 |
| Surfaces | tin-plated (standard) |
| | further surfaces such as nickel, silver, nickel/gold and others on demand |

| Dimensions (standard) | |
|-----------------------|--------------------------|
| Length x width | from 7 x 7 mm |
| Height above PCB | from 3 mm |
| Pin length | 3.5 mm, others on demand |
| Pin diagonal | 1.6 mm, others on demand |

| PCB | |
|---------------|--------------|
| Base material | FR4 (EP-GC-) |
| PCB thickness | from 1.5 mm |

| Processing parameters | |
|-----------------------|-----------------------------------------|
| Press-in force | min. 60 N per pin max. 250 N per pin |
| Retention force | 60 – 80 % of the press-in force |
| Press-in speed | 100 – 250 mm /min |



With comprehensive engineering expertise and as a pioneer for Powerelements, we will meet your requirements and find the best technical and economical solution - whether from our standard range or as a customised variant.



REACH
COMPLIANT



RoHS
COMPLIANT

POWERONE PRESS-FIT

Powerelements

PCB design

The PCB has to be designed in accordance with the latest edition of IPC A 600.

For solid press-fit technology, the PCBs are to be finished according to the Würth Elektronik ICS Press-fit specifications. Particular attention should be paid to the drill diameter and the copper thickness.

Torques

Torque values for the various thread dimensions can be found in the table opposite. Different material combinations or different thread lengths of the connectors are not listed here. Depending on the thread length, the bushes can be tightened with higher torques.

Current carrying capacity

The current carrying capacity of a press-fit connection always has to be considered in the context of the overall system. The press-fit zone has a very low electrical contact resistance of 100 – 200 µΩ.

The limiting factor therefore usually lies in the PCB layout, and also in the connection of a feed line.

Depending on the system structure, the values of the derating curve shown may vary.

Qualification


PowerOne Press-fit high current contacts have successfully passed the vibration test and the mechanical shock test according to ISO 16750-3 standard.

Vibration test according to ISO 16750-3:2012 4.1.2.7 Random Test VII.
Mechanical shock test according to ISO 16750-3:2012 4.2.3 Severity 2.

| Würth Elektronik ICS – Press-fit specification 5.1 (Example for 1.6 mm pin) | | |
|-----------------------------------------------------------------------------------------------------------|--|----------------------------------------------------------------------------------------------|
| Drill Ø | | drill tool drill hole 1.60 mm 1.60 - 0.025 mm |
| Cu | | Cu - in Hole Annular Ring Average 30 – 60 µm min. 25 µm, max. 80 µm* min. 125 µm |
| End Ø | | depends on surface HAL chem. surfaces (1.45 +/- 0.05 mm) (1.475 +/- 0.05 mm) |
| Note: For press-fit technology, drill Ø and copper thickness are fix. End Ø for reference only. | | |

*single measurement points in microsection

| Torques for brass | | | | | | | | |
|-------------------|------|-----|-----|-----|-----|-----|------|------|
| Thread | M2.5 | M3 | M4 | M5 | M6 | M8 | M10 | M12 |
| Nm | 0.3 | 0.5 | 1.2 | 2.2 | 3.9 | 9.0 | 17.0 | 35.0 |

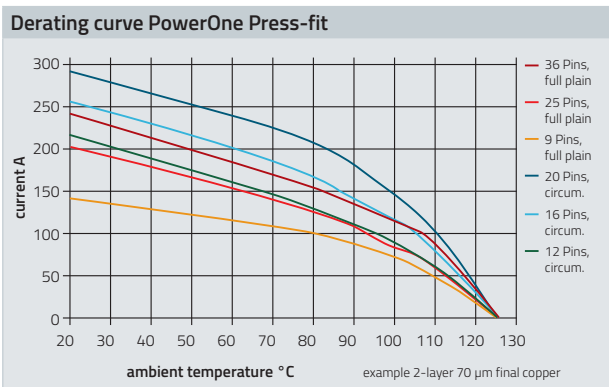

Overview PowerOne Press-fit standard products

| Construction form | | | | | |
|-----------------------|---------------------------------------------------|--|--|----------------------------------|--|
| Pins | Current carrying capacity at 20°C* / 85°C* | | | Dimensions | |
| 4, 6, 9 | ~ 60 – 135 A / ~ 36 – 81 A | | | for M2.5 – M3 with Ø 2.6 – Ø 3.4 | |
| 4, 6, 9 | ~ 60 – 135 A / ~ 36 – 81 A | | | for M2.5 – M5 with Ø 2.6 – Ø 5.5 | |
| 4, 8, 12, 16 | ~ 60 – 240 A / ~ 36 – 144 A | | | for M3 – M6 with Ø 3.2 – Ø 6.6 | |
| 4, 10, 16, 25 | ~ 60 – 375 A / ~ 36 – 225 A | | | for M4 – M6 with Ø 4.2 – Ø 6.6 | |
| 4, 10, 16, 25 | ~ 60 – 375 A / ~ 36 – 225 A | | | for M4 – M8 with Ø 4.2 – Ø 9.0 | |
| 12, 20, 36 | ~ 180 – 540 A / ~ 108 – 324 A | | | for M5 – M10 with Ø 5.2 – Ø 10.5 | |
| 14, 24, 40, 49 | ~ 210 – 735 A / ~ 126 – 441 A | | | for M5 – M10 with Ø 5.2 – Ø 10.5 | |
| 16, 28, 48, 64 | ~ 240 – 960 A / ~ 144 – 576 A | | | for M5 – M10 with Ø 5.2 – Ø 10.5 | |
| 18, 32, 56, 81 | ~ 270 – 1215 A / ~ 162 – 729 A | | | for M5 – M10 with Ø 5.2 – Ø 10.5 | |

* Recommended value for system design based on PCB limiting temperature of 125°C

All threads are also available in UNC.

Supplies

In the PowerCover product category, we offer a large choice of twist and contact protection elements. Press-fit tools and plates are available on demand.

We reserve the right to make technical changes and changes to the product range.
No liability for printing errors and mistakes

For more information visit us at:
www.powerelement.com
or call: +49 7940 9810-4444

Würth Elektronik ICS GmbH & Co. KG
Intelligent Power & Control Systems
Gewerbepark Waldzimmern · Würthstraße 1
74676 Niedernhall · Germany
+49 7940 9810-0 · Fax +49 7940 9810-1099
ics@we-online.com · www.we-online.com/ics