

General

Productgroup	LF PowerRadSok
Mounting type	Massive Pressfit Techn
Material	Brass lead-free (max. 0.1% Pb)
Surface	nickel
Customs tariff number	85369095
Country of origin	Federal Republic of Germany
Weight per piecs ~	0.200000 kg

Technical data

Terminal / Type	Bolt / Diameter
Diameter x Length	8.000 mm x 26.40 mm

Socket length x Socket width	16.000 mm x 16.00 mm
Socket height	5.50 mm
Socket rounded	no
Height total	34.40 mm
Height over pcb	31.40 mm
No. of Pins	25
Pin length	3.00 mm
Grid dimension X / Y	3.40 mm / 3.40 mm
Pin alignment	Full plain

Processing

Press in force	2160 N up to 9000 N
Retention force	60-80 % of press-in force
Press-in speed	100 mm/min. up to 250 mm/min.
PCB thickness	1.60 mm up to 3.20 mm
Notice	

Current carrying capacity

Part (20 °C) ~ / (85 °C) ~	250.000 A / 150.000 A
----------------------------	-----------------------

Usage and storage

Temperature	-40 °C up to +150 °C
Storage	dry environment protected from weather conditions
Storage conditions	at +5 °C up to +40 °C, 75% RH, non-condensing


Accessories

Press in tool	
---------------	--

Co-applicable documents

Powerelement Guidelines	Link to Powerelement Guidelines
-------------------------	---------------------------------

Standard drill pattern

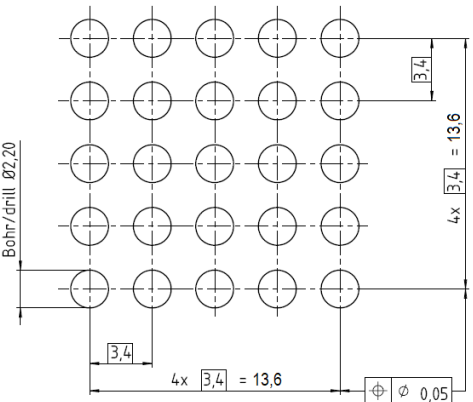






Drill hole specification for PCB

Drill Ø		drill tool	2,20 mm
		drill hole	2,20 mm - 0,025 mm
Cu		Cu - in Hole	Average 30 µm - 60 µm min. 25 µm, max. 80 µm *
End Ø		HAL	(2,050 mm +/- 0,05 mm)
		chem. surfaces	(2,075 mm +/- 0,05 mm)

Note: For Press-fit Technology drill diameter and copper thickness are fix. End Ø for reference only.

* single measurement points in microsection

Dimensions

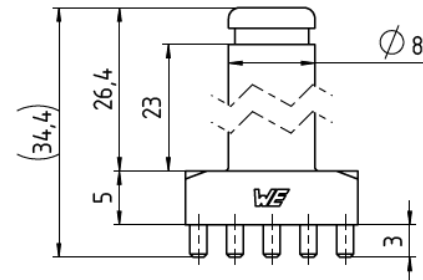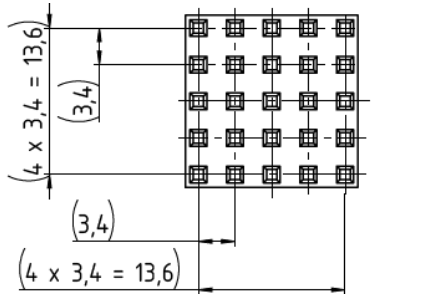

WÜRTH
ELEKTRONIK
MORE THAN
YOU EXPECT

Würth Elektronik ICS GmbH & Co. KG
Würthstraße 1 74676 Niedernhall, Germany
P +49 7940 9810-4444 lf-powerelement@we-online.de
www.lf-powerelements.com

Observe protective note ISO 16016. Passing on or duplication without previous written agreement forbidden. Violations oblige to compensation. All rights reserved in the event of a patent or utility model protection. Subject to change without notice! Is NOT subject to change service!

Generaltolerances
DIN ISO 2768-mH

Projection mode

Revision	Date	All measures in
B	12.08.25	mm

Part no.

LF999108

Description

LF PowerRadSok Bolt vertical



RoHS
COMPLIANT
LEAD-FREE
Pb < 0,1 %